

Specification

Product ID BOL / 0419


Description

Intelli Solaris Solar Perma-Cast™ Polymer Bollard - On Ground Fix - Painted in Black (RAL 9004).
Comprises of two LED lights. One running continuously at a low level to ensure the bollard can be seen from distance, the other, a down light reflector activated within a 5m range by PIR sensors on either side of the body.
As the bollard is solar powered, trenching and running costs associated with mains powered solutions are eliminated and maintenance costs reduced.
At the point of ordering please confirm the required fixing arrangement.

Dimensions

If dimensions are critical please contact sales to confirm

Brand: Intelli Solaris
Category: Bollards
Sub Category: Solar Bollard
Material: Perma-Cast™ Polymer
Max Dia: 135mm Square
Above Ground Height: 1020mm
Units: Each

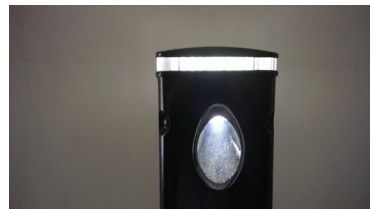

Specification		
Material	Perma-Cast Polymer	
Dimmed / Full Brightness	Marker	Down Light
Wattage (W)	120 mW	1W
Lumen Output	9 lm	72 lm (Achieved at full brightness)
Beam Angle Width (°)	39°	
Beam Angle Depth (°)	21°	
Colour Rendering Index (CRI)	>70	
Colour Temperature	4000K	
IP Rating	IP65	
Battery Life	7 Years	
Operating Temperature	-10 - +40°C	
Autonomy	10 Days	

Policy

Townscape's policy is one of continuous development, and we reserve the right to modify design specification or price without notice. The copyright, design rights and other intellectual property rights in the products and drawings shown and in the text displayed are the property of Townscape Products Limited.
All sizes and weights are nominal and the Company reserves the right to modify dimensions without notice. If dimensions or weights are critical please state when ordering.

