





Townscape CT30/CT40/CT50 Removeable Bollard REMOVAL OPERATION



VED/0009R VED/0011R VED/0015R

REMOVAL OPERATION - DETAIL



CT30/CT40/CT50 Removeable
Bollards use the same procedure

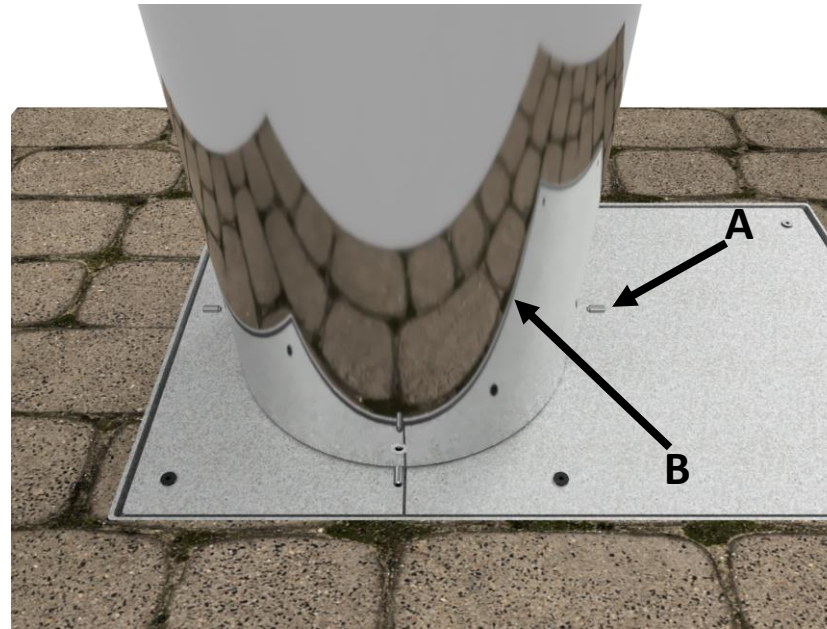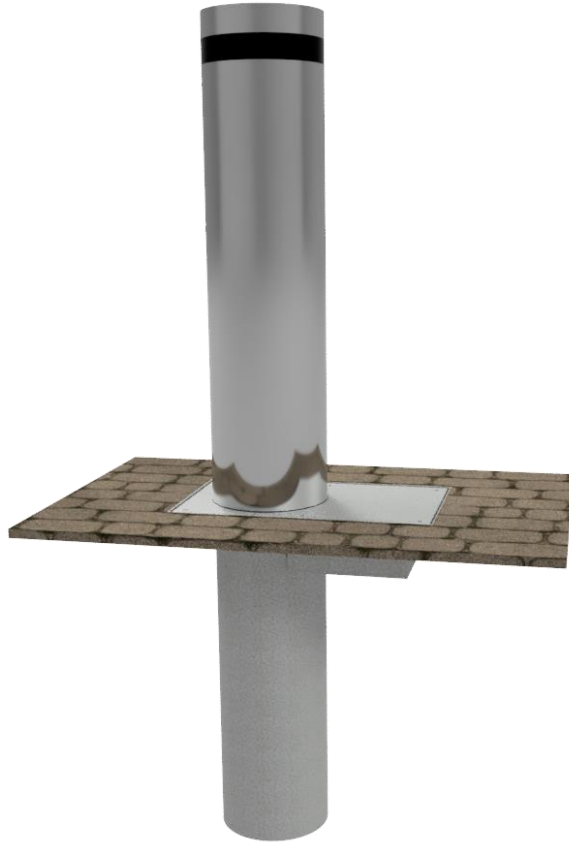

R1

Remove Grub Screws (A) from Stainless Steel Sleeve (B) *If Bollard has a sleeve*
Remove Sleeve (B)
Remove Cap (C) from Steel Bollard (D)


REMOVAL OPERATION - DETAIL

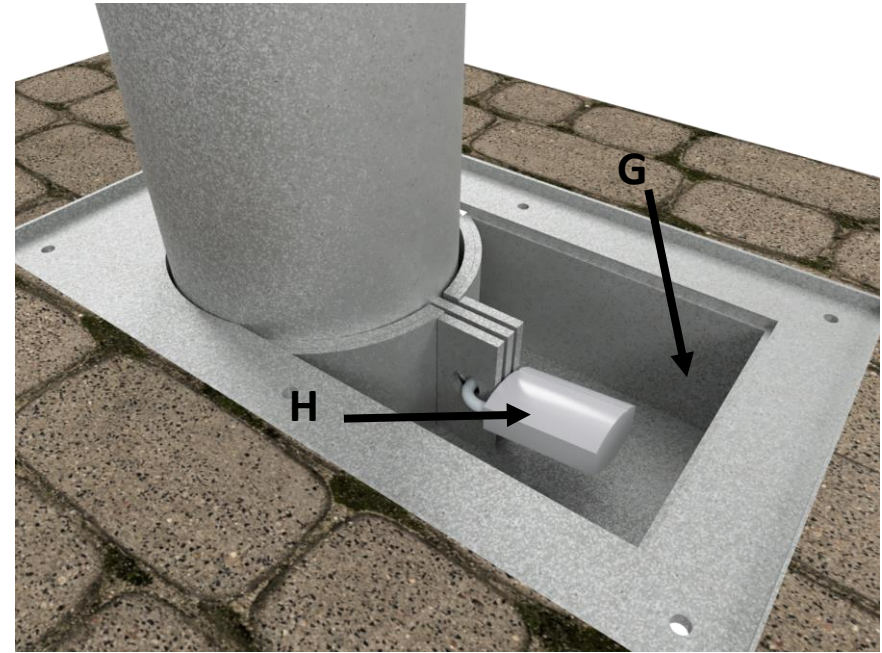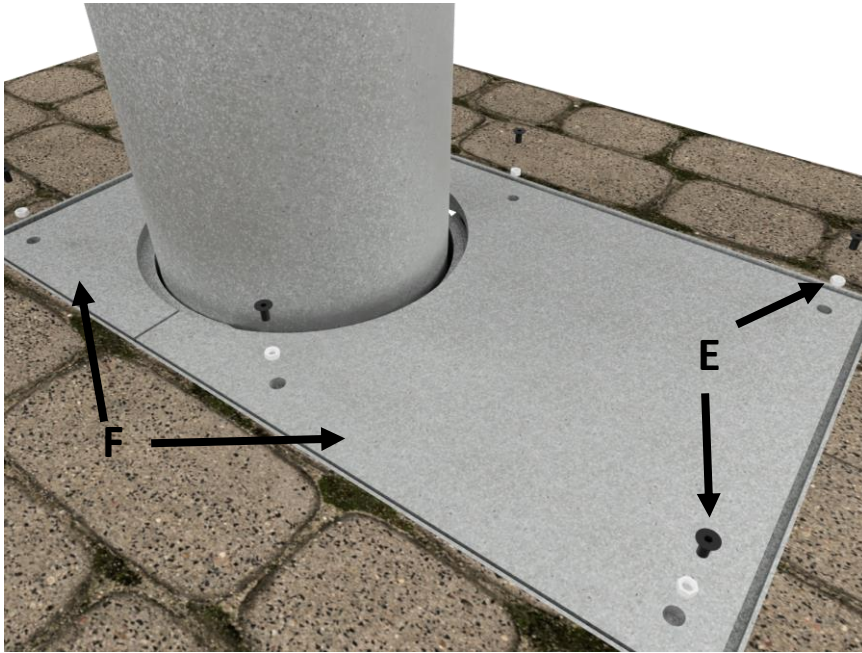

R2

- Remove** all 6 sets of Screws and Nuts (E) from Covers (F)
- Remove** Covers (F) from Bollard Shoe (G)
- Remove** Padlock (H)

REMOVAL OPERATION - DETAIL

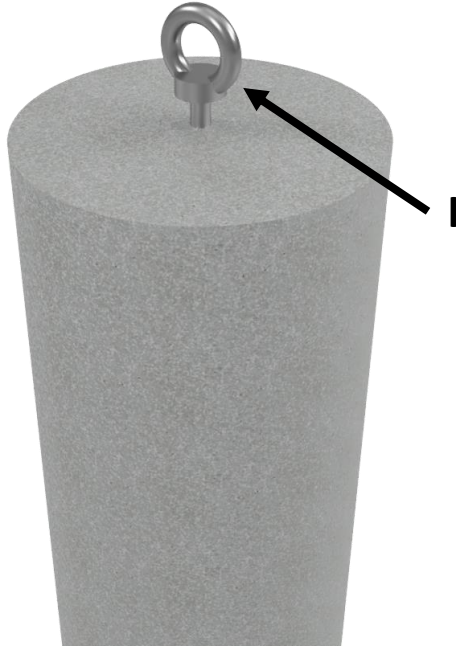


R3

Screw M12 lifting insert (I) into Bollard
Using Lifting Hoist (J) lift Bollard from Bollard Shoe



REMOVAL OPERATION - DETAIL

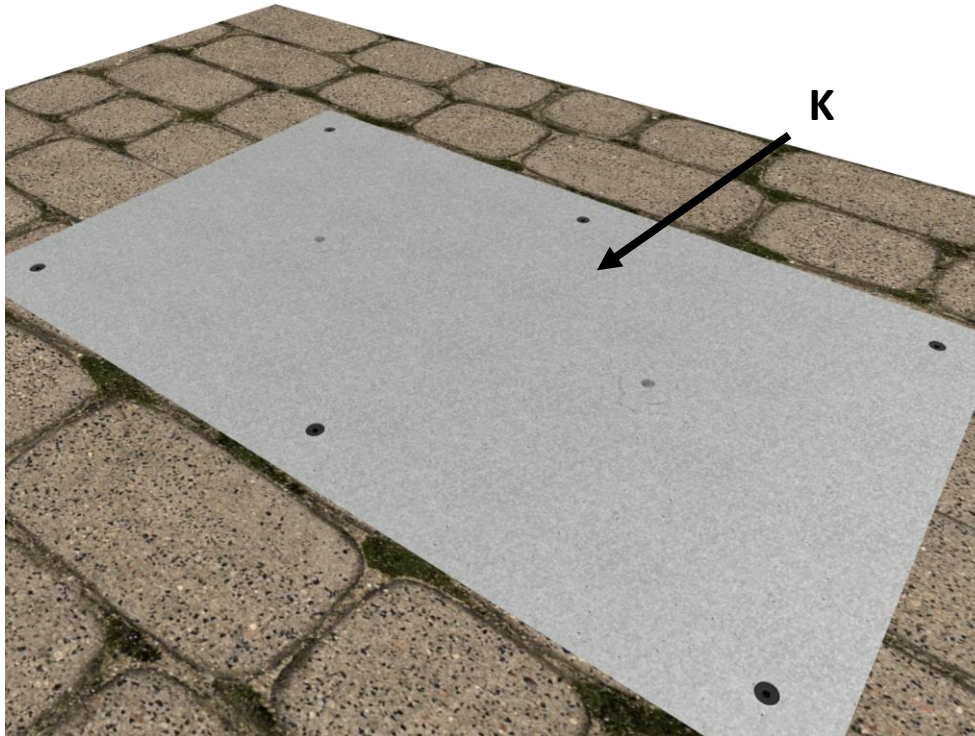

For Reinstallation of
the CT30/CT40/CT50
Bollards use the same
procedure in reverse

R4

Attach cover (K) onto the Bollard Shoe using Nuts and Screws