

SPECIFICATION SHEET

Product ID VED / 0044 PLT

CT PLANTER

Description

Counter Terror Block Planter with 15mm Chamfered Edges. Finished in a range of Artisan Premier Precast Concrete.


A variant of this product is PAS 68:2010 tested to the following classifications:


30mph test – single block: V/7500/N2/48/90/6.6/0.0 40mph test – single block: V/7500/N2/64/90/12.3/2.2 (Tested block size 1490 x 990 x 600mm minimum mass) And PAS 68:2005 tested to the following classification: 30mph test comprising 3 staggered blocks: V/7500/ N2/48/60/2.0/0.0

This product is available in a range of Premier smooth and exposed concrete finishes.

Specialist installation advice is available for this product







ISO 9001 Quality Management Systems CERTIFIED

Drainage	

OPTIONS	Process	
Mild Steel	Cladding	
Patterned Mild steel	Cladding	
Corten	Cladding	
Timber	Cladding	
Integrated Timber	Seating	
Sealant	Coating	
Anti Graffiti	Coating	

Dimensions

If dimensions are critical please contact sales to confirm.


Range	Vehicle Defence	
Installation	100mm in Ground	
Materials	Artisan Precast Concrete	
Dimensions W x D x H	1490 x 990 x 1000mm	
Height above Ground	900mm	
Unit Weight	2700kg	

Finishes	Premier Range	Finishes	Exposed Range	
	Grey		Cloburn Red	
	Dark Grey		Cleehill Dark Grey	
	White		Silver Aberdeen	
	Buff		Silver Grey Cornish	
	Light Sandstone	Optional Bespoke Finishes		
	Dark Sandstone			
Optional	Bespoke Finishes	Please contact the Sales Office for Sample finishes		

Policy

Townscape's policy is one of continuous development, and we reserve he right to modify design specification or price without notice. The copyright, design rights and other intellectual property rights in the products and drawings shown and in the text displayed are the property of Townscape Products Limited.

All sizes and weights are nominal and the Company reserves the right to modify dimensions without notice. If dimensions or weights are critical please state when ordering




Product ID VED / 0044PLT



Water needs to be allowed to drain away to prevent the planter from being filled. Townscape CT Concrete Planters are manufactured with 2 x 70mm diameter drainage holes to help with this process. To ensure the water has somewhere to go a gully pot or equivalent can be installed to collect and transport the water away. Alternatively having 200mm of granular material (or whatever depth is required to reach permeable ground) underneath the planter to ensure the water reaches permeable material would be sufficient to allow an escape route.

SPECIFICATION SHEET

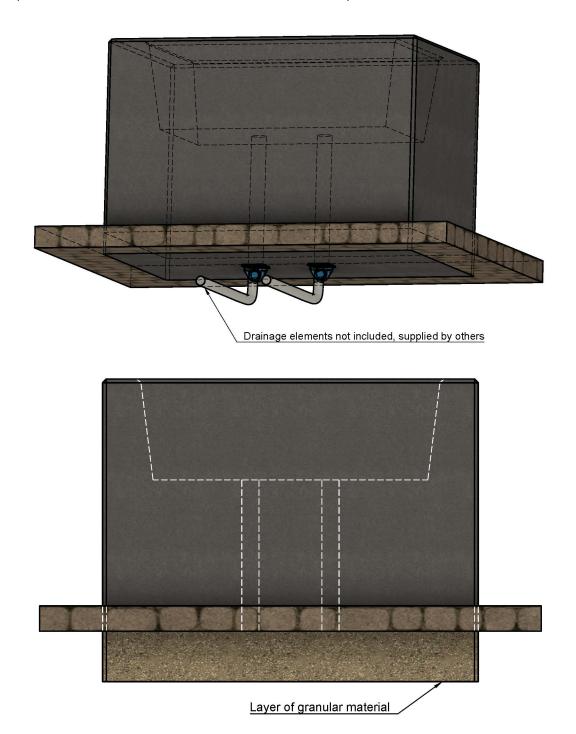

For more information about any aspect of this product please call the Townscape Sales Office on +44 (0) 1623 513355

Townscape Products Ltd, Fulwood Road South, Sutton-in-Ashfield. Nottinghamshire NG17 2JZ