

Product ID VED/0015SMCS


PAS 68 CT50SMCS BOLLARD


Description

CT50SMCS NA/02 Mild Steel CT Bollard – 200mm – 300mm Shallow fit , 3 Bollard Array Galvanised Finish. The CT50SM N2/02 is a high security bollard designed to mitigate a vehicle attack at 80kph. **At 3.8m the penetration depth is exceptionally low for the speed of impact.** The bollard has been successfully tested and approved by the CPNI. The normal spacing for bollards will be 1200mm. A concrete foundation will be required for this product.

The product is IWA 14 approved to the following classifications:
50mph Test – Fixed Bollard: IWA14-1:2013
V/7200[N2A]/80/90:3.8 Specialist installation advice is available for this product. This product can be fitted in a stepped array to accommodate gradients up to 1:16.

Range	CT Bollards
Installation	200 - 300mm depth
Materials	Specialist Grade Steel
Dimensions W x D x H	273mm Dia x 1300mm
Height above Ground	1000mm
Unit Weight	628kg

Finish	Description
	HDG Steel or Powder Coated to RAL colour

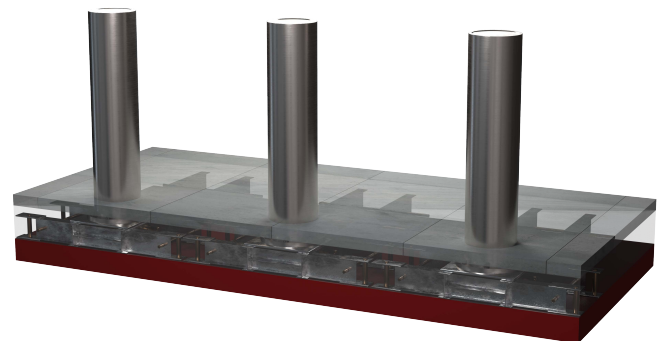

OPTIONS	Description	Part Code
	Class 1 Reflective WHITE Tape Band 50mm	TAP/50W
	Class 1 Reflective YELLOW Tape Band 50mm	TAP/50Y
Stainless steel Sleeve	Premium 2k Finish Grade 316	VED/0043

For additional Options and detailed installation advice please call our sales office on 01623 513355

Policy

Townscape's policy is one of continuous development, and we reserve the right to modify design specification or price without notice. The copyright, design rights and other intellectual property rights in the products and drawings shown and in the text displayed are the property of Townscape Products Limited.

All sizes and weights are nominal and the Company reserves the right to modify dimensions without notice. If dimensions or weights are critical please state when ordering.

