

Product ID VED/0044PLT Series

CT Block Planter

Description

Counter Terror Block Planter with 15mm Chamfered Edges. Finished in a range of Artisan Premier Precast Concrete.

A variant of this product is PAS 68:2010 tested to the following classifications:

30mph test – single block: V/7500/N2/48/90/6.6/0.0

40mph test – single block: V/7500/N2/64/90/12.3/2.2

(Tested block size 1490 x 990 x 600mm minimum mass)

And PAS 68:2005 tested to the following classification:

30mph test comprising 3 staggered blocks: V/7500/N2/48/60/2.0/0.0

Installation

Surface should be flat . Lift planter into position. Place into the base of the planter Terram 1000 or equivalent filter membrane. Add 150mm of pea shingle to the bottom of the planter. Add additional water reservoir if needed. Plant using the specified medium and plant from the horticultural specialist. Ensure proper drainage underneath any surface mounted planters, e.g holes through the surface material deep enough to reach a permeable material layer to allow water to percolate away.

Range	Vehicle Defence
Installation	100mm in Ground
Materials	Artisan Precast Concrete
Height above Ground	900mm

SKU	Dimensions	Unit Weight
VED/0044	1490x990x600	2700kg
VED/0044250PLT	2500x990x600	4800kg
VED/0044300PLT	3000x990x600	5700kg

Finishes Premier Range		Finishes Exposed Range	
	Grey		Cloburn Red
	Dark Grey		Cleehill Dark Grey
	White		Silver Aberdeen
	Buff		Silver Grey Cornish
	Light Sandstone	Contact the sales office for sample finishes	
	Dark Sandstone		

ADDITIONAL OPTIONS

Integrated Timber Seating
Steel Cladding
Sealant Coating
Anti Graffiti Coating




Policy

Townscape's policy is one of continuous development, and we reserve the right to modify design specification or price without notice. The copyright, design rights and other intellectual property rights in the products and drawings shown and in the text displayed are the property of Townscape Products Limited.

All sizes and weights are nominal and the Company reserves the right to modify dimensions without notice. If dimensions or weights are critical please state when ordering.





PLT/0044 Premier Dark Grey

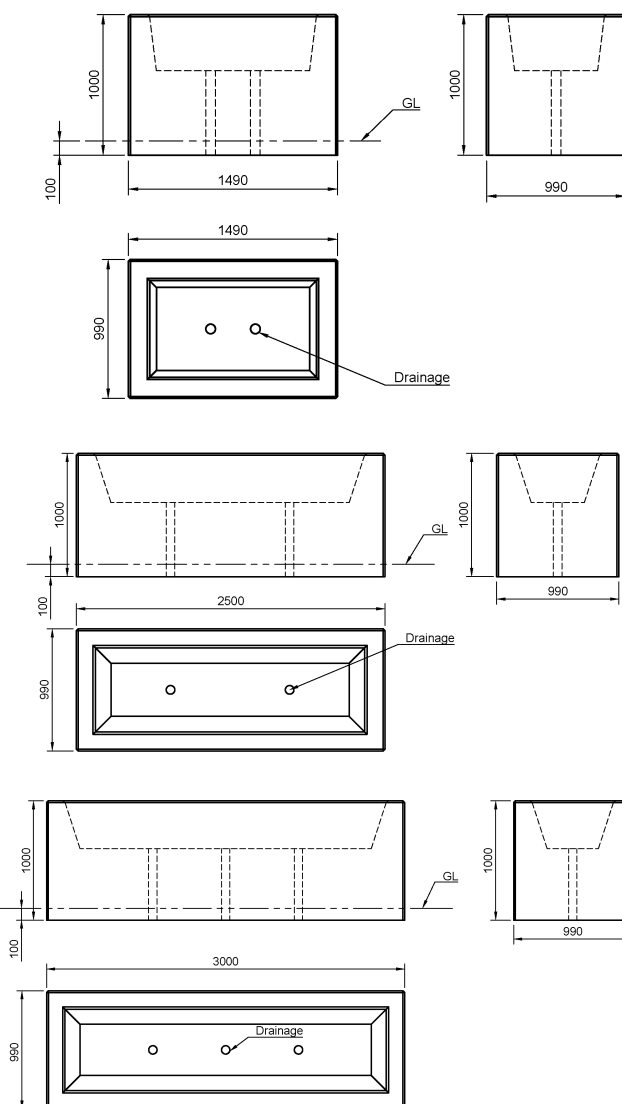

Product ID **VED / 0044PLT**

CT Block Planter

Water needs to be allowed to drain away to prevent the planter from being filled. Townscape CT Concrete Planters are manufactured with 2 x 70mm diameter drainage holes to help with this process. To ensure the water has somewhere to go a gully pot or equivalent can be installed to collect and transport the water away. Alternatively having 200mm of granular material (or whatever depth is required to reach permeable ground) underneath the planter to ensure the water reaches permeable material would be sufficient to allow an escape route.

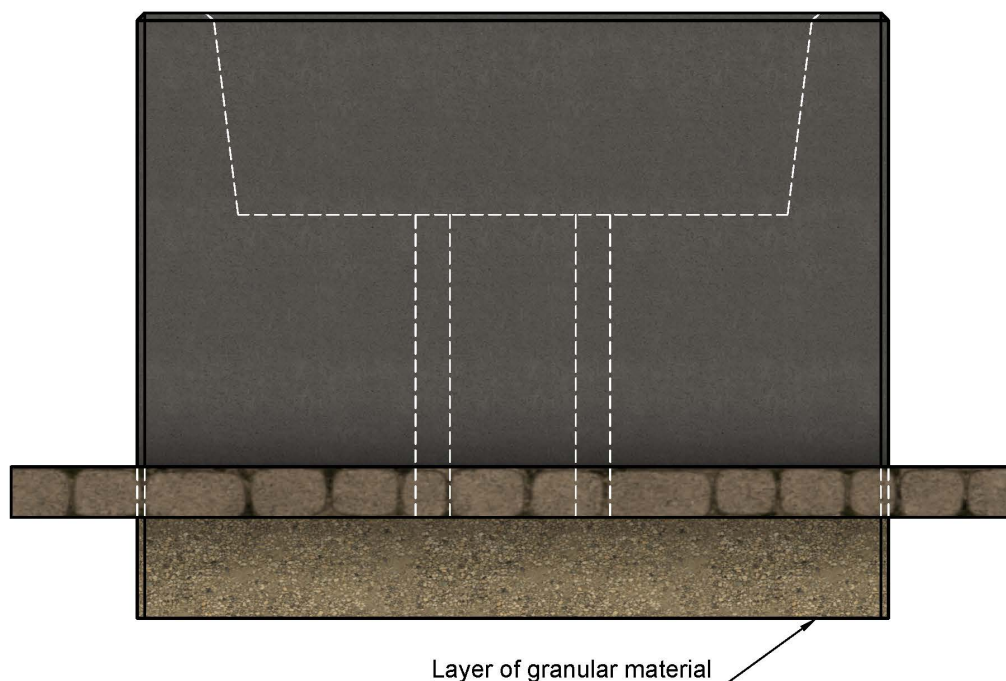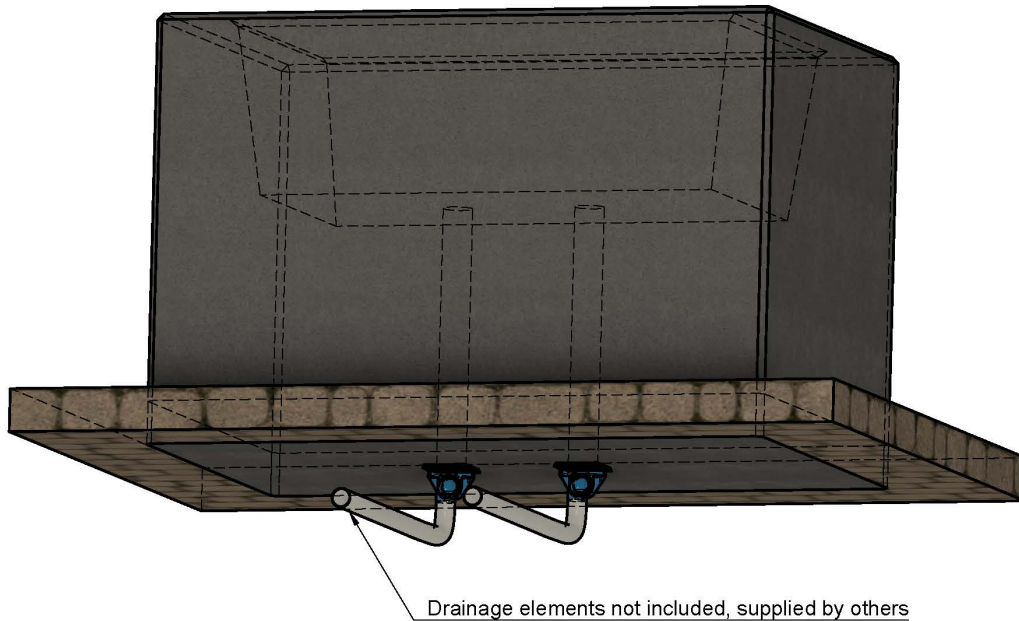

For more information about any aspect of this product please call the Townscape Sales Office on +44 (0) 1623 513355

Townscape Products Ltd, Fulwood Road South, Sutton-in-Ashfield. Nottinghamshire NG17 2JZ

Telephone +44 (0) 1623 513355 Email sales@townscape-products.co.uk

© 2023 Townscape Products Ltd E&O.E.